NIVISS



NPASSENGER




The Niviss nPassanger interior luminaire is an LED lighting solution designed to enhance the comfort of drivers and passengers. It provides spot lighting for the driver's workspace. It can also be used as dedicated spot lighting for passengers. High-quality LEDs from the American company CREE® ensure high quality LED light, while touch control increases the efficiency and safety of this lighting solution.

Working temperature range	-30°C ÷ +60°C		
IP protection class	IP20		
Lifetime L80B10	≥ 50 000h		
Impact resistance	IK08		
Protection class	III		
Dimming	ON-OFF		
Luminous flux tolerance	±10%		
Angle of distribution	35°		




TECHNICAL DRAWINGS

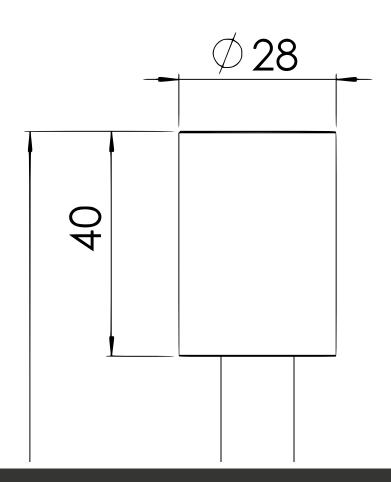






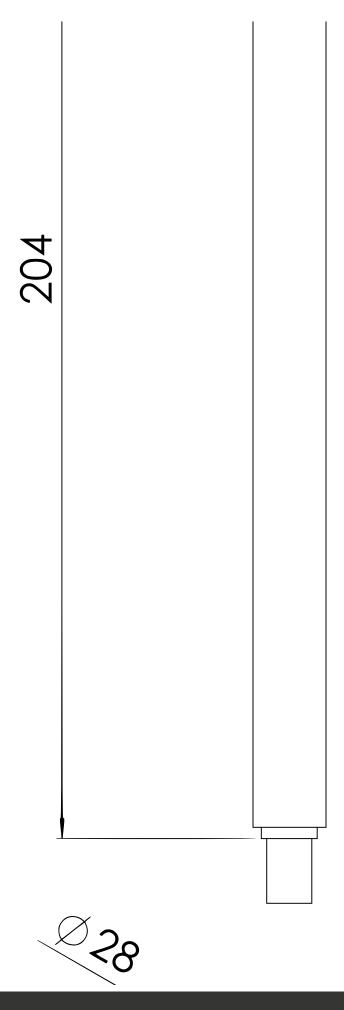

NIVISS



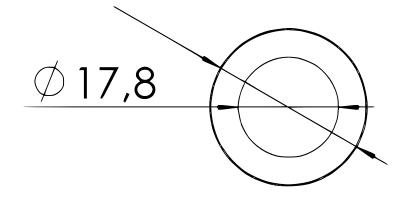






NPASSENGER

Niviss nLinear indoor LED luminaire is an ideal solution

- locomotives
- electric and diesel multiple
- passenger coaches
- subway trains
- streetcars

ELECTRICAL INSTALLATION

Connecting to the power supply should be done when the power supply is off.

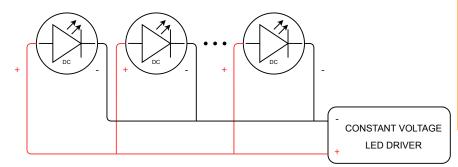

ORDER CODE AND TECHNICAL SPECIFICATIONS OF VARIANTS

VARIANT CODES IN THE TABLE BELOW TECHNICAL SPECIFICATIONS OF VARIANTS IN DATASHEET OF VARIANT

GENERAL TERMS OF USE

- Before using a luminaire, make sure what voltage range it is designed to.
- Connecting to the power supply should be done when the power supply is off.
- Use appropriate sockets and plugs: Ensure that your electrical sockets and plugs are compatible with the lamp's voltage and plug type.
- Use appropriate wiring for luminaires.
- Avoid overloading electrical circuits by not connecting too many lamps to a single outlet or circuit. Check the condition of the power cord and plug for any signs of damage
- Pay attention to the correct polarity when connecting the luminaires. Incorrect polarity may prevent the luminaires from functioning properly or could potentially damage them.
- Installation of the luminaires should be done by qualified person.
- Keep your luminaires clean and free from dust and debris, as it can affect their performance.
- Follow the luminaire connection diagram above.
- Avoid direct exposure of bright light sources to your eyes. Position luminaires in a way that minimizes direct glare or uncomfortable brightness.
- Ensure that the luminaire is placed on a stable surface and kept away from flammable materials. Allow sufficient clearance around the luminaire to prevent overheating.
- Keep away from fire.

ENVIRONMENTAL CAUTION!





ORDER CODE AND TECHNICAL SPECIFICATIONS OF VARIANTS

Index	[DEG]	[K]	CRI/RA	[W]	Power supply type
NPASSENGER-2-WW-35-RD-A-LV	35	3000	≥80	2	LV