



Symmetric/Assymmetric

INTRODUCTION SAVE ENERGY WITH NIVISS

The Brick series was designed using modern simulation methods in order to obtain the highest product quality. Brick series fixtures are made of top-quality materials such as marine grade steel, high-purity glass for optical applications, and modern CREE LEDs .

- 230V AC
- 316L Steel front/ and ALU body
- Power: 11W
- 2 Types Symmetric or Assymmetric
- IP65
- 5-year warranty

APPLICATIONS The Niviss Brick fixture can be used for lighting many places and objects such as:

- Gardens
- Ramps
- Façade Lighting
- Stairs
- Terraces
- Squares

Contact: +48 58 781 33 99 sales@niviss.com www.niviss.com

NIVISS reserves the right to make technical changes without prior notice.

SPECIFICATION


LIGHT COLOUR	WARM WHITE
Colour Temperature*	3000 ± 150 K
Effective Source Lumen Output**	950-850 lm
CRI	≥ 80
Input Voltage	230V AC 50/60Hz
Power Consumption	11 W
Operating Temperature.	-20°C + +55°C
Dimensions	210mm x 91mm x 93mm
Cable Type	H07-HR-F
Cable Length	0,5m
IP Rating	IP65
Lifetime***	60,000≥ h

* Other CCTs and colours available on request.

** Source performance in real-life conditions at Ta=25°C; includes optical losses; the tolerance of source lumen output is 5%.

*** Approximate lifetime of LEDs declared by Cree® at Ta=25°C (for 90% of initial light output) and other electronic components


DIMENSIONS [mm]

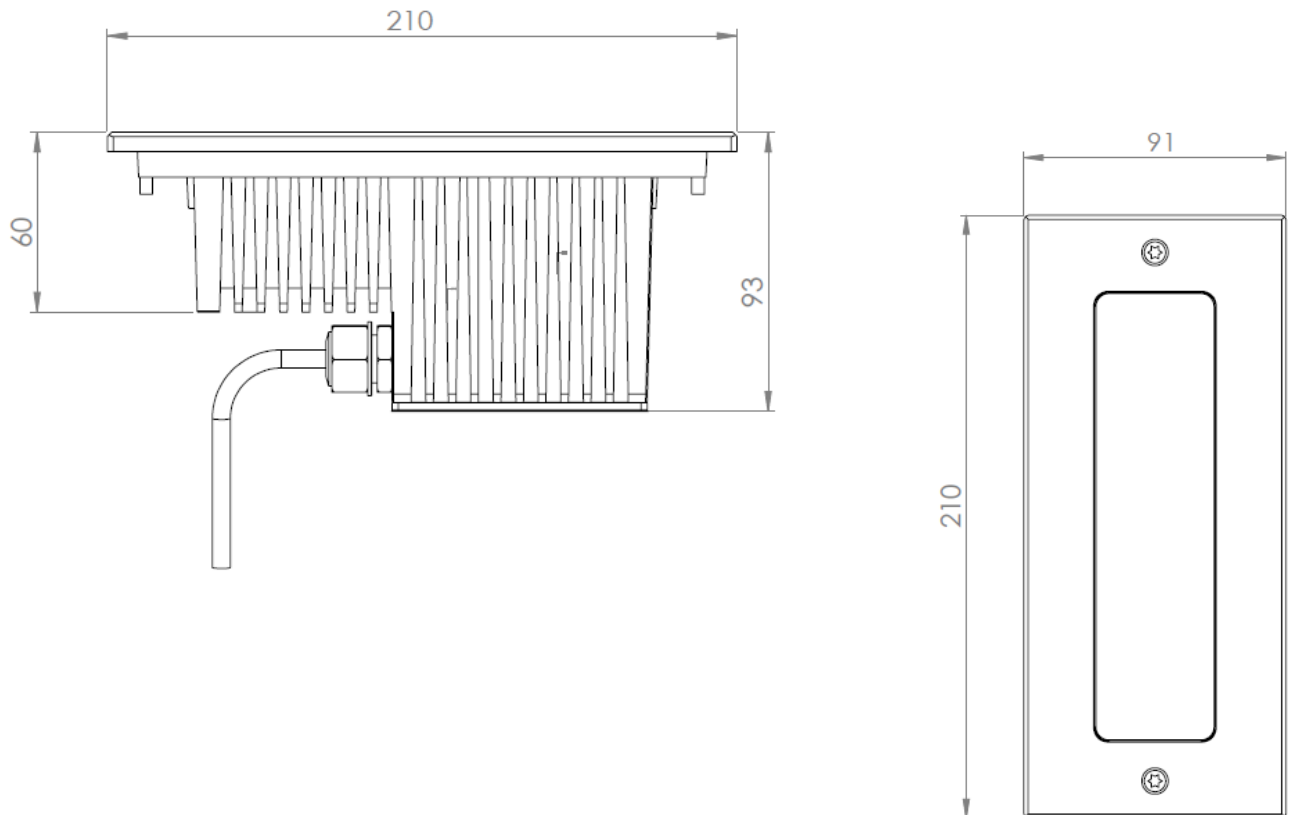

Contact: +48 58 781 33 99 sales@niviss.com www.niviss.com

NIVISS reserves the right to make technical changes without prior notice.

ELECTRICAL INSTALLATION

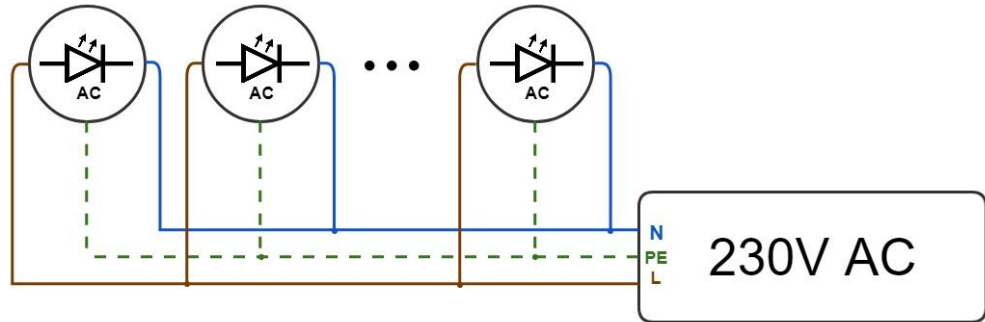

Connecting to the power supply should be done when the power supply is off.

ORDER CODE FORMAT

			40-40 degree AS- Asymmetric	SA - Steel front and aluminum body MATERIAL OF THE FRONT/BODY				
nBRICK	-	W W	-	40	-	SA	-	H V
FAMILY		CCT W W - 2700K W W - 3000K N W - 4000K						HV-230 V AC

ENVIRONMENTAL CAUTION



Caution!

It is prohibited to dispose of obsolete and waste electrical and electronic equipment together with regular household wastes. They should be properly sorted and recycled. Old electrical and electronic equipment should be returned to a waste collection point established by a waste-management service. Waste electrical and electronic equipment can be broken down to base materials and then recycled. For more information regarding waste management please contact your local authorities, waste-management service or the seller of electrical and electronic devices.